ROOM NAMES	FLOOR		WALLS	CEILING		DOORS		REMARKS
	MATERIAL	BASE	MATERIAL	MATERIAL	HEIGHT	DOOR	FRAME	
SALES AREA	RESILIENT FLOORING LVT-1	WOOD BASE B5 & WOOD BASE FROM RS-7 KIT APART	* GYP. BD. & BLOCKING PAINTED FROM FLOOR TO CEILING P5-SF * WOOD LEDGE WL-3 U.N.O. @ PERIMETER WALLS	GYP. BD. P5	17'-0" A.F.F.	EXISTING	EXISTING	* WRAP EXISTING EXPOSED COLUMN WITH GYP. BD. PAINTED P5-SF AND WOOD BASE B5 * PAINT P20 ABOVE WOOD LEDGE
FIT STUDIO	RESILIENT FLOORING LVT-1	WOOD BASE B5	* WP-2 W/ B5 BASE @ FITTING ROOM WALLS FACING FIT STUDIO	GYP. BD. P5	17'-0" A.F.F.	–	–	* WP-1 W/ B5 BASE INSIDE EACH FITTING ROOM
STOCK/EMPLOYEE/ MANAGER'S AREA	(E) CONCRETE C01 C02	VINYL BASE B1	* GYP. BD. P5-SG	EXPOSED CEILING	–	P19	P19	* PROVIDE BLOCKING FOR ALL WALL MOUNTED EQUIPMENT / FIXTURES
PUBLIC TOILET	VINYL FLOORING VCT-5	VINYL BASE B10	* VINYL SHEET RVS-1 AT WET WALL AND GYP. BD. P19 ABOVE * GYP. BD. P19 OTHER WALLS	GYP. BD. P5-MG	8'-5 1/2" A.F.F.	P19	P19	
CORRIDOR	RESILIENT FLOORING LVT-1	WOOD BASE B5	* GYP. BD. P5-SG * WALL GUARDS WG-1 AND CORNER GUARDS WG-2	GYP. BD. P5	8'-5 1/2" A.F.F.	P19	P19	* VINYL SHEET RVS-1 WAINSCOT @ DRINKING FOUNTAINS
EXISTING VESTIBULE	REQUIRED M-3 @ VESTIBULE	EXISTING	EXISTING, P5-SG	EXISTING, P5 @ VESTIBULE	EXISTING, V.I.F.	EXISTING	EXISTING	* PATCH AND REPAIR EXISTING VESTIBULE AS NECESSARY
MOP SINK CLOSET	(E) CONCRETE C01 C02	VINYL BASE B10	* WAINSCOT WA-1 * GYP. BD. P19 ABOVE	EXPOSED CEILING	–	P19	P19	* WAINSCOT WA-1 TO 4'-0" A.F.F., ALL WALLS
ELECTRICAL CLOSET	(E) CONCRETE C01 C02	–	–	EXPOSED CEILING	–	P19	P19	

NOTES:
1. WALLS TO BE PAINTED FLOOR TO CEILING U.O.N.
2. FOR EXPOSED CEILING: PAINT CEILING U.N.O. & ALL EXPOSED MEP ELEMENTS, EXCEPT DUCTS. DO NOT PAINT LIGHTING UNISTRUT GRID NOR THREADED ROD DROPS U.O.N.
3. SEE PLANS & ELEVATIONS FOR EXACT FINISH LOCATIONS
4. ALL PLYWOOD & BLOCKING TO BE F.R.T.

ROOM FINISH SCHEDULE 5

&	AND	C.P.M.	CONST. PROJECT MANAGER	FT.	FOOT, FEET	MECH.	MECHANICAL	RM.	ROOM
<	ANGLE	DBL.	DOUBLE	F.V.	FIELD VERIFY	MFR.	MANUFACTURER	S.	SOUTH
@	AT	DTL.	DETAIL	G.C.	GENERAL CONTRACTOR	MGR.	MANAGER	S.C.	SOLID CORE
C	CENTERLINE	DIA.	DIAMETER	GA.	GAUGE	MIN.	MINIMUM	S.S.	STAINLESS STEEL
#	POUND OR NUMBER	DIM.	DIMENSION	GL.	GLASS	MISC.	MISCELLANEOUS	SHT.	SHEET
ACOUS	ACOUSTICAL	DN.	DOWN	GYP.	GYPSUM	MTL	METAL	SIM.	SIMILAR
ADJ	ADJUSTABLE	DWG	DRAWING			N.	NORTH	SPEC.	SPECIFICATION
A.F.F	ABOVE FINISH FLOOR	(E)	EXISTING	H.M.	HOLLOW METAL	N.I.C.	NOT IN CONTRACT	SQ.	SQUARE
ALUM.	ALUMINUM	EA.	EACH	HC.	HANDICAPPED	N.T.S.	NOT TO SCALE	STD.	STANDARD
ARCH.	ARCHITECTURAL	ELEV.	ELEVATION	HDWD.	HARDWOOD	(N)	NEW	STL.	STEEL
ATH.	ATHLETA	ELEC.	ELECTRICAL	HORIZ.	HORIZONTAL	NOM.	NOMINAL	STOR.	STORAGE
BD.	BOARD	EMER.	EMERGENCY	HGT.	HEIGHT	O.D.	OUTSIDE DIAMETER	SUSP.	SUSPENDED
BLDG.	BUILDING	EQ.	EQUAL	HR.	HOUR	OFI	OWNER FURNISHED ITEM	T.O.	TOP OF
BLK.	BLOCK	E.W.C.	ELEC. WATER COOLER	HVAC	HEATING, VENTILATION, AIR CONDITIONING	OPP.	OPPOSITE	THK.	THICK
BLKG.	BLOCKING	F.E.	FIRE EXTINGUISHER			P.LAM.	PLASTIC LAMINATE	TYP.	TYPICAL
BOH	BACK OF HOUSE	F.O.	FACE OF	I.D.	INSIDE DIAMETER	PL.	PLATE	U.O.N	UNLESS OTHERWISE NOTED
B.O.	BOTTOM OF	F.O.F.	FACE OF FINISH	INSUL.	INSULATION	PLAS.	PLASTER	VERT.	VERTICAL
BET.	BETWEEN	F.O.S.	FACE OF STUDS	JT.	JOINT	PLYWO.	PLYWOOD	V.I.F.	VERIFY IN FIELD
CL.	CENTERLINE	F.R.P.	FIBERGLASS REINFORCED PANEL FINISH	LAM	LAMINATE	PR.	PAIR	W.	WEST
CLG.	CEILING			LB(S)	POUNDS	PT.	POINT	W/	WITH
CLKG	CAULKING	F.R.	FIRE RETARDANT	LL	LANDLORD	R.	RISER	W/C	WATER CLOSET
CLR.	CLEAR	FIN.	FINISH	L.O.C	LOCATION	RAD.	RADIUS	W/O	WITHOUT
COL.	COLUMN	FIT. RM.	FITTING ROOM	LT.	LIGHT	REG.	REGISTER	W/R	WATER RESISTANT
CONC.	CONCRETE	FL.	FLOOR	MIR.	MIRROR	REQ'D	REQUIRED	WD.	WOOD
CONT.	CONTINUOUS	FLOUR.	FLUORESCENT	MAX.	MAXIMUM	RESIL.	RESILIENT	WT.	WEIGHT

ABBREVIATIONS 4

GENERAL NOTES
ANY DISCREPANCIES BETWEEN THE (E) CONDITIONS DOCUMENTS AND THE ACTUAL FIELD DOCUMENTS SHALL BE BROUGHT TO THE ATTENTION OF THE OWNER'S REPRESENTATIVE BEFORE PROCEEDING WITH ANY WORK.

REGULATIONS
1. THE CONTRACTOR SHALL HAVE EVIDENCE OF CURRENT WORKER'S COMPENSATION INSURANCE ON FILE IN COMPLIANCE WITH LOCAL CODE.
2. BEFORE COMMENCING WITH THE WORK, THE GC SHALL SHOW EVIDENCE OF ALL THE INSURANCE REQUIREMENTS.
3. THE CONTRACTOR SHALL BE FAMILIAR WITH ALL LANDLORD REQUIREMENTS AND SHALL BE RESPONSIBLE FOR COMPLIANCE WITH SAME. THE CONTRACTOR SHALL INVESTIGATE LOCAL CODES AND PROCEDURES AND SHALL COMPLY WITH ALL REQUIREMENTS.
4. SIGN CONTRACTOR TO OBTAIN SIGN PERMITS FROM BLDG DEPT. AS APPLICABLE. AN IDENTIFYING STICKER MAY BE INSTALLED, PROVIDING IT CANNOT BE SEEN BY PASSERSBY.
5. THE CONTRACTOR SHALL CONTACT LANDLORD REPRESENTATIVE BEFORE CONSTRUCTION COMMENCES.
6. ALL CONDUIT, EQUIPMENT AND MATERIALS SHALL BE IN FULL ACCORDANCE WITH THE LATEST SAFETY RULES AND REGULATIONS OF ALL AUTHORITIES AND AGENCIES HAVING JURISDICTION.
7. THE CONTRACTOR SHALL MAINTAIN FOR THE ENTIRE DURATION OF THE WORK ALL EXITS, EXIT LIGHTING, FIRE PROTECTION DEVICES AND ALARMS IN CONFORMANCE WITH ALL APPLICABLE CODES AND ORDINANCES.
8. PROVIDE OCCUPANCY SIGNS CONFORMING TO APPLICABLE BUILDING CODE REQUIREMENTS.
9. PROVIDE ADDITIONAL EXIT SIGNS AND FIRE EXTINGUISHERS IN TYPE, NUMBER AND LOCATIONS AS DIRECTED BY THE FIRE DEPARTMENT FIELD INSPECTOR.

JOB SITE OPERATIONS
1. DURING ALL PHASES OF WORK DO NOT DISTURB THE DELIVERIES AND FUNCTIONS OF ADJACENT AND NEIGHBORING TENANTS.
2. EACH CONTRACTOR SHALL LEAVE THE SITE IN A NEAT, CLEAN AND ORDERLY CONDITION UPON THE COMPLETION OF HIS WORK ON A DAILY BASIS. AREA OF WORK TO BE DUSTED, SWEPT AND MOPPED TO SAME CONDITION AS START OF WORK. ALL WASTE, RUBBISH AND EXCESS MATERIALS SHALL BE REMOVED FROM THE SITE PROMPTLY. THE GC SHALL BE RESPONSIBLE FOR REMOVAL AND DISPOSAL OF ALL TRASH, INCLUDING TRASH GENERATED FROM OWNER FURNISHED ITEMS AND BY OWNER'S CONTRACTORS FOR THE DURATION OF THE PROJECT.
3. ALL EXISTING WORK NOT IN THIS SCOPE OF WORK SHALL BE MAINTAINED IN ITS ORIGINAL CONDITION, U.O.N. PROTECT WORK FROM DAMAGE RESULTING FROM THIS WORK.
4. REMOVE ALL ABANDONED IMPROVEMENTS, INCLUDING ELECTRICAL AND MECHANICAL, U.O.N.

MATERIALS
1. WHEN CONTRACTOR ACCEPTS DELIVERY OF ALL ITEMS NOTED ON PLANS WHETHER IN CONTRACT OR NOT IN CONTRACT, HE SHALL BE RESPONSIBLE FOR LOSS AND/OR DAMAGE TO THESE ITEMS.
2. G.C. SHALL BE RESPONSIBLE FOR COORDINATION WITH OWNER'S REPRESENTATIVE TO PROVIDE A TIMELY ARRIVAL OF ALL MATERIALS, EQUIPMENT & OTHER SUCH ITEMS TO BE UTILIZED ON THIS PROJECT (OWNER-PROVIDED OR OTHERWISE). G.C. SHALL NOTIFY OWNER'S REPRESENTATIVE IN WRITING WITHIN 5 DAYS OF DATE OF APPROVED WORK AUTHORIZATION OF THOSE ITEMS THAT MAY NOT BE READILY AVAILABLE. IF NOTIFICATION IS NOT PROVIDED TO THE OWNER'S REPRESENTATIVE, THE G.C. ACCEPTS RESPONSIBILITY FOR THE PROPER ORDERING AND FOLLOW-UP OF SPECIFIED ITEMS AND WILL PURSUE WHATEVER MEANS NECESSARY AT NO ADDITIONAL COST TO OWNER.
3. CONTRACTOR TO ENSURE AVAILABILITY OF ALL SPECIFIED ITEMS SO AS NOT TO CREATE A HARDSHIP TO THE OWNER AND NOT DELAY PROGRESS OF THE WORK. NO EXTENSION OF TIME SHALL BE PERMITTED.
4. CONTRACTOR SHALL BE RESPONSIBLE TO RECEIVE, INVENTORY, STORE AND SECURE ANY OWNER FURNISHED ITEMS (OFI) SUPPLIED AND DELIVERED TO THE JOBSITE, OR OTHER AGREED UPON LOCATION, AND FORWARD THE RECEIVING DOCUMENT(S) TO THE OWNER'S REPRESENTATIVE – SEE PRE-BID LETTER FOR DETAILS REGARDING OWNER-FURNISHED ITEMS.
5. THE CONTRACTOR SHALL LEAVE WITH STORE MANAGER ONE (1) GALLON OF PAINT OF EACH COLOR FOR FUTURE TOUCH-UP WORK.
6. NO SUBSTITUTIONS OF ANY MATERIALS OR ITEMS SPECIFIED IN THE DOCUMENTS ARE PERMITTED, U.O.N. AND APPROVED BY OWNER'S REPRESENTATIVE.
7. ANY WOOD CONSTRUCTION SHALL BE FIRE RETARDANT TREATED. INTERIOR FINISHES SHALL NOT EXCEED A FLAME SPREAD RATING OF 25 AT EXIT CORRIDORS.

BUILDING ENVELOPE
1. ALL OPENINGS, FLASHING, COUNTER FLASHING, AND EXPANSION JOINTS SHALL BE WATERTIGHT.
2. ALL OPEN JOINTS, PENETRATIONS AND OTHER OPENINGS IN THE BUILDING ENVELOPE SHALL BE SEALED, CAULKED, GASKETED OR WEATHERSTRIPPED TO LIMIT AIR LEAKAGE.
3. USE ACOUSTICAL SEALANT A ROUND ALL PIPES, DUCTS, CONDUIT, OUTLETS, SWITCHES, ETC. ON BOTH SIDES OF CROSSING / PENETRATING WALLS WITH THERMAL AND ACOUSTICAL INSULATION.
4. ALL SAW CUTTING AND CORING LOCATIONS SHALL BE REVIEWED AND COORDINATED WITH THE LANDLORD PRIOR TO CUTTING/ CORING.

DRAWINGS
1. ALL CONTRACTORS, SUBCONTRACTORS, VENDORS AND MATERIAL SUPPLIERS SHALL BE RESPONSIBLE FOR REVIEWING THE COMPLETE SET OF DOCUMENTS AS SHOWN IN THE SHEET INDEX. FAILURE TO REVIEW CONSTRUCTION DOCUMENTS WILL NOT RELIEVE ANY CONTRACTORS, SUB-CONTRACTORS, VENDORS OR MATERIAL SUPPLIERS FROM PERFORMING WORK OR PROVIDING MATERIALS REQUIRED FOR THE COMPLETION OF THIS PROJECT AS DEFINED WITHIN THE DOCUMENTS AT TIME OF BID.
2. GENERAL CONTRACTOR SHALL COORDINATE WORK PERFORMED BY OTHER CONTRACTORS. ANY DISCREPANCIES SHALL BE BROUGHT TO THE OWNER'S REPRESENTATIVE'S ATTENTION BEFORE PROCEEDING WITH WORK.
3. SHOULD A CONFLICT EXIST BETWEEN THE CONSTRUCTION DOCUMENTS AND/OR THE SPECIFICATIONS THE OWNER'S REPRESENTATIVE SHALL BE INFORMED OF THIS DISCREPANCY IMMEDIATELY, AT WHICH TIME OWNER'S REPRESENTATIVE SHALL PROVIDE DIRECTION AS TO HOW TO PROCEED.
4. INSPECT SITE AND VERIFY FIELD DIMENSIONS BEFORE COMMENCING WITH CONSTRUCTION. NOTIFY OWNER'S REPRESENTATIVE AND LANDLORD IMMEDIATELY IF THERE ARE ANY SIGNIFICANT DISCREPANCIES.
5. DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS TAKE PRECEDENCE OVER SCALED DRAWINGS.
6. ARCHITECTURAL DRAWINGS TAKE PRECEDENCE OVER OTHER DRAWINGS FOR LAYOUT DIMENSIONS AND NUMBER OF ITEMS PROVIDED. UPON DISCOVERY OF DISCREPANCIES BETWEEN ARCHITECTURAL DRAWINGS AND ENGINEERING DRAWINGS, OWNER'S REPRESENTATIVE SHALL BE IMMEDIATELY NOTIFIED IN WRITING.
7. IF ANY ERRORS OR OMISSIONS APPEAR IN CONTRACT DOCUMENTS CONTRACTOR SHALL NOTIFY OWNER'S REPRESENTATIVE IN WRITING OF SUCH ERRORS OR OMISSIONS.
8. DIMENSIONS SHOWN ON PLANS ARE TO FACE OF EXTERIOR MASONRY, CONCRETE COLUMNS OR GRID LINES AND FACE OF STUD UNLESS OTHERWISE NOTED OR DETAILED.
9. THE CONTRACTOR SHALL REVIEW ALL DOCUMENTS, VERIFY ALL DIMENSIONS AND FIELD CONDITIONS AND CONFIRM WORK IS BUILDABLE AS SHOWN. ANY CONFLICTS OR OMISSIONS, ETC. SHALL BE IMMEDIATELY REPORTED TO THE ARCHITECT / OWNER'S REPRESENTATIVE FOR CLARIFICATION PRIOR TO PERFORMANCE OF ANY WORK IN QUESTION.
10. COLUMN CENTER LINE (OR GRID LINES) ARE SHOWN FOR DIMENSIONS. VERIFY EXACT LOCATIONS IN FIELD.
11. A COPY OF LANDLORD-APPROVED CONSTRUCTION DOCUMENTS MUST BE ON SITE DURING CONSTRUCTION.
12. OWNER'S REPRESENTATIVE AND TENANT ARE THE SAME FOR PURPOSES OF THESE DRAWINGS.
13. ALL DIMENSIONS MARKED "CLEAR" SHALL BE MAINTAINED AND SHALL ALLOW FOR THICKNESS OF ALL FINISHES.
14. LOCATE FIRE EXTINGUISHERS AS DIRECTED BY FIRE MARSHAL IN FIELD.

GENERAL NOTES 3

CODE	ITEM	DESCRIPTION	FURNISHED BY	INSTALLED BY	KEY NOTES	SUBMITTAL REV'D BY	COMMENTS
FLOOR BASE							
B1	VINYL BASE	ROPPE: PINNACLE 4" TOELESS VINYL BASE, CONTINUOUS ROLL, COLOR: #150 DARK GRAY, 700 SERIES	G	G	–		
B5	WOOD BASE	MORGAN LI: 3/4" X 4 1/2" – WHITE OAK	O	G	–		
B10	VINYL BASE	ROPPE: PINNACLE 4" COVE VINYL BASE, CONTINUOUS ROLL, COLOR: #129 DOLPHIN, 700 SERIES	G	G	–		
WAINSCOT							
WA-1	WAINSCOT	MASONITE/MARLITE: WHITE PEBBLE SURFACE (FRP) P100	G	G	–		
WA-2	CORK BACKBOARD	1/4" NATURAL CORK	G	G	–		APPLIED TO ¾" FIBER BOARD PANELS WITH LOCTITE POWER GRAB MOLDING & PANELING ADHESIVE
RVS-1	RIGID VINYL SHEET	INPROCORP: IPC RIGID VINYL SHEET #G2, 0.040" THICK, COLOR: #238 FEATHER	G	G	–		GC TO PROVIDE INNER CORNER PROFILE #409 AND TOP CAP PROFILE #407, COLOR TO MATCH PANEL
WG-1	WALL GUARD	INPROCORP: WALL GUARD 700 SERIES #G2, 7 ¾"H X 1"D, COLOR: #238 FEATHER	G	G	–		GC TO PROVIDE INNER CORNER PROFILE #707, OUTER CORNER PROFILE #702 AND END CAP PROFILE #701 WHERE REQUIRED, COLOR TO MATCH WALL GUARD
WG-2	CORNER GUARD	INPROCORP: CORNER GUARD 160BN, 2"W FOR 90° CORNERS, COLOR: #238 FEATHER	G	G	–		
WG-3	CORNER GUARD	INPROCORP: 1 ⅜" X 1 ⅜" X 8' CLEAR CORNER GUARDS	G	G	–		GC TO COUNTERSINK AND PAINT SCREWS TO MATCH P20
WALLPAPER							
WP-1	WALLPAPER	ASTEK: WHITE VINYL WALL COVERING: JDCMWC-14	G	G	2		CONTACT: JEFF DEY, JEFF@ASTEK.COM TEL: 818-901-9876 x113 OR AMY DAY, AMY.D@ASTEK.COM TEL: 818-901-9876 x149
WP-2	WALLPAPER	ASTEK: LINEN VINYL WALL COVERING: JD-20001	G	G	2		CONTACT: JEFF DEY, JEFF@ASTEK.COM TEL: 818-901-9876 x113 OR AMY DAY, AMY.D@ASTEK.COM TEL: 818-901-9876 x149
PLASTIC LAMINATE							
PL1	PLASTIC LAMINATE	WILSON ART: "FROSTY WHITE" – CONTACT: RICHARD WYLIE 972-523-1027	G	G	–		CABINETS AT EMPLOYEE AREA & MANAGER'S DESK
CONCRETE							
C01	CONCRETE SEALER	FLORIC POLYTECH: CLEARSEAL	G	G	–		GC TO BEAD BLAST & SEAL CONCRETE
C02	CONCRETE SEALER	FLORIC POLYTECH: USE AS REQUIRED	G	G	–		APPLY ARDEX SELF-LEVELING TOPPING SYSTEM AS REQUIRED IN SLOPED AREAS. REFER TO SPECS
VINYL FLOORING							
VCT-5	VINYL FLOORING	ARMSTRONG: DECORART REJUVENATIONS CLASSICS; 6 FT W ROLL; COLOR #34331 "LITHOS STONE FELSITE"	G	G	12		
LVT-1	RESILIENT FLOORING	METROFLOR: ASPECTA 10, PERFECT OAK HONEY SKU #0416004, 0.394" THICK, 7.48" X 47.64" PLANK SIZE	O	G	12		SALES AREA, FIT STUDIO AND CORRIDOR FINISH FLOOR. COLOR MATCHING TRANSITIONS STRIPS PROVIDED BY VENDOR, INSTALLED BY GC
PAINT (NO SUBSTITUTIONS)							
P5	PAINT	BENJAMIN MOORE: SUPER WHITE PM-1, SOLO 100% ACRYLIC INT/EXT FLAT FINISH	G	G	–		NOTE: EXTENT OF PAINT TO INCLUDE AREAS BEHIND FIXTURES. SEE SPECIFICATIONS FOR PRIMER
P5-SF	PAINT	BENJAMIN MOORE: SUPER WHITE PM-1, SOLO 100% ACRYLIC INT/EXT EG-SHELL FINISH	G	G	–		
P5-MG	PAINT	BENJAMIN MOORE: SUPER WHITE PM-1, SOLO 100% ACRYLIC MARINE GRADE FINISH	G	G	–		
P5-SG	PAINT	BENJAMIN MOORE: SUPER WHITE PM-1, SOLO 100% ACRYLIC INT/EXT SEMI-GLOSS FINISH	G	G	–		
P14-EX	PAINT	SHERWIN WILLIAMS: ATHLETA PURPLE SOLO 100% ACRYLIC INT/EXT EG-SHELL FINISH	G	G	–		
P19-SG	PAINT	SHERWIN WILLIAMS: TINTED TO SITE WHITE SW 7070 SOLO 100% ACRYLIC INT/EXT SEMI-GLOSS FINISH	G	G			
P19	PAINT	BENJAMIN MOORE: SUPER WHITE PM-1, COROTECH HIGH PERFORMANCE, PRE-CATALYZED WATERBORNE EPOXY SEMI-GLOSS V341	G	G	–		
P20	PAINT	BENJAMIN MOORE: BALBOA MIST #1549, SOLO 100% ACRYLIC INT/EXT EG-SHELL FINISH	G	G	–		
RUBBERIZED TAPE / FLOOR STRIPPING							
RT1	RUBBERIZED TAPE	STOP-PAINTING.COM: IN-50-6711-25, 2" X 25' RED BACKGROUND / WHITE LETTERING. CONTACT: CLIFF LOWE @ 866-323-8843, cliff@stop-painting.com	G	G	–		ELECTRICAL PANEL
RT2	RUBBERIZED TAPE	STOP-PAINTING.COM: IN-40-2011, 2" X 100' YELLOW. CONTACT: CLIFF LOWE @ 866-323-8843, cliff@stop-painting.com	G	G	–		PATHWAY TAPE
RT3	RUBBERIZED TAPE	STOP-PAINTING.COM: IN-50-6701-25, 4" X 25' YELLOW BACKGROUND / BLACK LETTERING. CONTACT: CLIFF LOWE @ 866-323-8843, cliff@stop-painting.com	G	G	–		KEEP AREA CLEAR
RT4	RUBBERIZED TAPE	STOP-PAINTING.COM: IN-50-6721-25, 2" X 25' WHITE BACKGROUND / RED LETTERING. CONTACT: CLIFF LOWE @ 866-323-8843, cliff@stop-painting.com	G	G	–		FIRE EXTINGUISHER

REFER TO G0-2 SHEET FOR GENERAL AND KEY NOTES. REFER TO COVER SHEET FOR FINISH MATERIAL CLASS AND FLAME SPREAD RATING REQUIREMENTS

FINISH SCHEDULE 2

DRAWING SYMBOLS 1

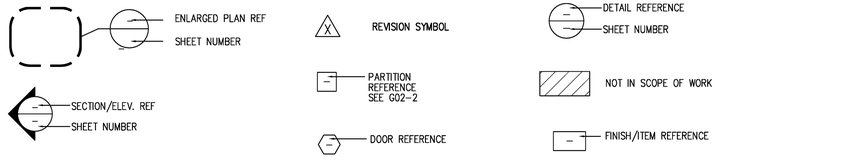

NEW STORE

ATHLETA

GAP INC.
STORE DEVELOPMENT
2 FOLSOM STREET
SAN FRANCISCO, CA 94105

ORACLE I.D.: 140261
STORE NUMBER: 7341
STORE LOCATION: STATION PARK
230 NE PROMONTORY
SPACE C-120
FARMINGTON, UT 84025

DESIGN TYPE: DERBY B
GENERATION: 21Q34
PROTOTYPE DATE: 1/8/2021
OPENING: 2021

ARCHITECT INFO:

brr

ARCHITECT OF RECORD:
MARIAH MEYER
8131 METCALF AVE
SUITE 300
OVERLAND PARK, KS 66204

www.brrarch.com

TEL: 913-262-9095
FAX:913-262-9044

CONSULTANT INFO:

PROFESSIONAL STAMP:

ISSUE TYPE:
LL/PERMIT/BID: 02/19/21

REVISIONS:

DRAWN BY: KDA
A/E JOB NUMBER: 65011072

TITLE SHEET:
ROOM FINISH SCHEDULE AND FINISH SCHEDULE

SHEET NUMBER:
G0-3