

FM-200®

The Right Choice...

A quality fire protection system is much more cost effective than replacing high-value critical data and sensitive electronic equipment.

Pyro-Chem has integrated state-of-the-art detection technology and clean-agent chemistry to provide affordable fire protection.

Fast.

Pyro-Chem offers two programmable releasing panels (PCR-100 and PCR-400IP) that are compatible with fast acting smoke detectors to sense fire in its early stages. Upon system release, FM-200 Clean-Agent is discharged.

► Effective.

Similar to Halon 1301, FM-200 agent extinguishes Class A, B and C fires by interrupting the chemical chain reaction. It absorbs heat, accelerating the suppression process.

► Safe.


The U.S. EPA has accepted FM-200 for use in occupied spaces at concentrations up to 9% by volume and up to 10.5% by volume for normally non-occupied spaces. It is non-toxic when used in accordance with NFPA Standard 2001.

Clean.

When protecting valuable assets or sensitive equipment, FM-200 agent stands above conventional agents. Unlike dry chemical, FM-200 is a colorless, odorless gas that leaves no residue to clean up. Unlike water, FM-200 is an electrically nonconductive agent that will not short-out electronic equipment. And unlike the very cold discharge of carbon dioxide, FM-200 will not thermally shock delicate circuitry.

Earth Friendly.

FM-200 will not deplete stratospheric ozone and it has a short atmospheric lifetime (31-42 years). As such, it is part of the EPA's SNAP list of acceptable Halon alternatives that are approved for use in total flooding, special hazard fire suppression systems.

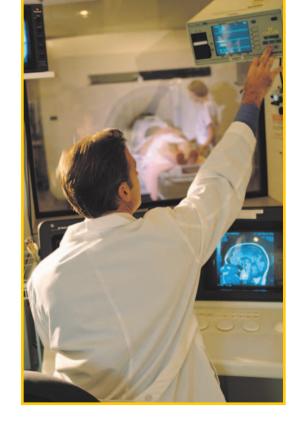


Fire System Selection...

Pyro-Chem FM-200 Systems are recommended when one or more of the following conditions exist:

- ➤ The value of the area's contents or its importance to business continuity requires a fire suppression system that can react in seconds.
- Water sprinklers will damage the contents of the area to be protected.
- Personnel occupy the area to be protected.
- Post fire cleanup must be eliminated.
- Ease of design and installation is needed.



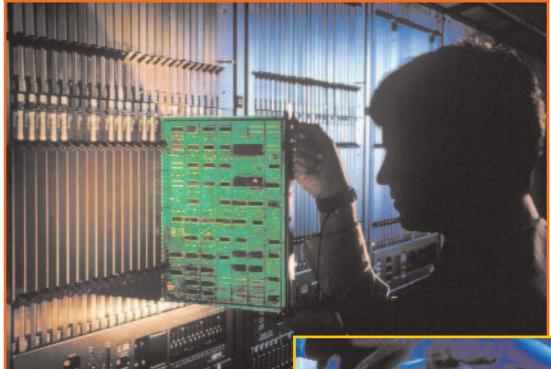

Typical Applications...

- ► Cell Sites
- ► Computer Rooms & Subfloors
- ► Laboratories
- ► Healthcare Facilities
- ▶ Museums, Art Galleries, Libraries
- ► Process Control Rooms
- ► Robotic Systems
- ► Tape Storage Libraries
- ► Telecommunications Facilities
- ► Telephone Equipment Rooms
- ► Vaults/Record Storage
- ► Historical Buildings

The Best Service in the Industry...

Our hassle-free purchasing process is just the beginning. Pyro-Chem has highly skilled technicians available to answer any questions during the planning, installation or operation of its systems after the sale.

Approvals and Standards

- ► Factory Mutual Research Corporation (FMRC)
- **►** Underwriters Laboratories, Inc. (UL)
- ► Underwriters Laboratories of Canada (ULC)
- ► NFPA 2001: Clean Agent Fire Extinguishing Systems
- ► ISO-14520: Gaseous Fire Extinguishing Systems
- **► EPA SNAP Report**
- **► MEA Approved**





Alarm Bell --

Among other warnings, the control unit sounds the alarm bell, alerting workers to clear the area.

Detectors --

Smoke and heat detectors sense a fire in the protected area. A signal is sent immediately to the control unit.



Pyro-Chem now offers FM-200® agent in a 343 L (757 lb.) tank with liquid level indicator... more protection in less space.

Control Panel --

Upon activation, it begins a series of actions: sounding audible and visual warnings, closing down ventilation systems and triggering the discharge of the suppression system.

For more information...

About FM-200_® systems or other Pyro-Chem products:

ATTENDANT™II Gas Station Fire Protection KITCHEN KNIGHT® II Cooking Area Fire Protection MONARCH® Industrial Fire Protection TRITON™/PCR Detection & Control FLAG FIRE Hand Portable Extinguishers

Contact Pyro-Chem at:

Pyro-Chem One Stanton Street Marinette, WI 54143

(800) 526-1079 (USA/Canada) 715-732-3465 (International)

www.pyrochem.com

Agent Tanks --

Consist of approved DOT and TC high pressure steel tanks, factory filled with FM-200 agent and pressurized with dry nitrogen to 360 psi (25 bar) at 70°F (21°C).



ISO 9001 Registered