

MUELLER® Series R-2365-6 OS&Y Resilient Wedge Valve

2.5" – 8" • Ductile Iron • 250 PSIG Working Pressure

Extruded Bar Stock Stem

Strengthened stainless steel stem for less maintenance.

Ductile Iron Body and Bonnet

Body and bonnet both made of ductile iron.

Guide Cap Bearings

Guide cap bearings are made of polymer and snapped over rubber covered wedge guides, provide bearing surfaces that protect both wedge and interior body coating from wear and aid in easy operation.

100% Elastomer Encapsulated Wedge

No thin spots, voids or uncoated areas for superior corrosion resistance.

Epoxy Coating

Superior fusion-bonded powder epoxy inside and out, 10 mils nominal. AWWA C550 compliant.

UL Listed


Rated at 250 PSIG maximum working pressure. Hydrostatically tested at 500 PSIG. NSF 61 certified.

American Made Quality

Made in Chattanooga, Tennessee plant certified to ISO 9001.

Flat Bottom Surfaces

Stands upright for easier handling and storage.

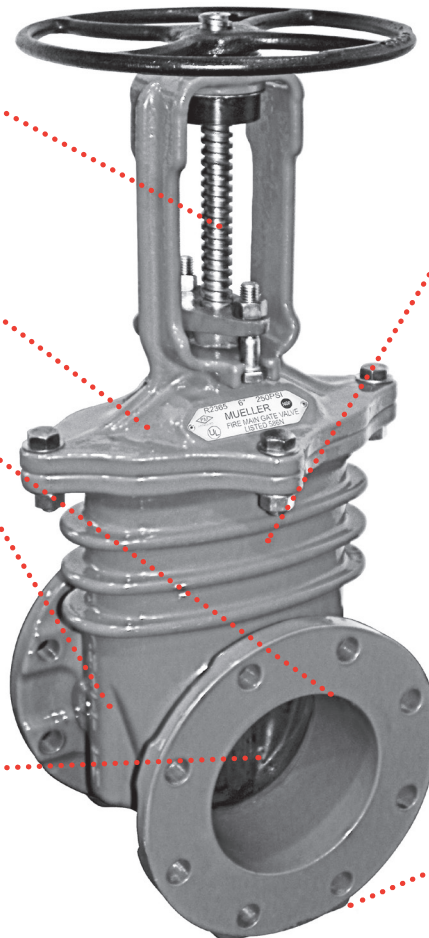

Mueller 10 Year Limited Warranty

Mueller Co.

Customer Service – Decatur, IL

Water Division : 800-423-1323

www.muellercompany.com

Canada – Mueller Canada Inc., Barrie, Ontario 705-719-9965

All products must be installed and maintained in accordance with applicable instructions and/or standards.

Copyright 2011 Mueller Co.